

Smart Slot JX

The Second Generation of J Series Readers



Since 1990, the Smart Slot J has been the reader of choice for users and OEMs throughout the world. The JX Series continues this legacy with enhanced features and flash upgrade capability.

Features & Options

- Programmable LEDs
- Character masking (insertion & deletion)
- Infrared or visible optics
- 5V, 12V, or 24V operation
- Networking
- Alphanumeric Display
- Good read beep
- Internal Relay
- Sense Inputs
- Power over ethernet
- Weatherproofing
- Reads Kronos, CAC, and USIC cards

Interfaces

- Wiegand
- Magstripe emulation (ABA)
- F2F
- Wieaba/Alphawie
- Rs232
- Rs232 Wedge
- TCP / IP
- TTL ASCII or Inverted TTL ASCII
- Wand emulation
- Rs422/Rs485
- USB


International Bar Code

Specifications

Barcode Scanning Speed:	3"-30" per second (7.62cm–76.2cm/sec)
Scanning Direction:	Bidirectional
Symbologies:	Code 39, I 2 of 5, 2 of 5, IND 2 of 5, Code 128, Codabar, EAN13, UPCA
Interfaces:	Wiegand, ABA, Rs232, Rs232 Wedge, Rs422/Rs485 (2 wire or 4 wire), TCP / IP, TTL ASCII, INV TTL ASCII, Wand emulation, F2F, USB
Resolution:	5 mil
Good Read Beep:	Programmable
Slot Width:	0.050" (127mm)
Displays:	8 character alpha display (optional)
Sense Inputs:	2 TTL sense inputs (optional)
Power Consumption ¹ :	5V 145mA typical 250 max / 12V 90mA typical 140 max / 24V 45mA typical 75 max / POE 90mA
Material:	Black polycarbonate / Noryl (chemical resistant case) (optional)
Dimensions:	4.6" L x 2.4" W x 1.4" H (11.68cm L x 6.10cm W x 3.56cm H)
Weight:	6oz (170.1 grams)
Read Height:	.4" standard (1.02cm) / .465 (1.19cm) (optional)
Indicators:	2 programmable LEDs (optional)
Relay ² :	30V DC 500mA Isolated form C relay (optional)
Trigger Output:	TTL trigger output (optional)
Light Source:	630nm visible / 940nm infrared
Temperature:	-40°C to +85°C standard
Standard Wiring:	3ft (91.5cm) cable, flying leads or connectors depending on interface

¹Maximum power consumption does not include alphanumeric displays. 5V DC readers have a voltage tolerance of +/-5%. 12V DC readers may be operated from 8VDC–15VDC. 24V DC readers may be operated from 15V DC–30V DC.

²POE readers can also be ordered with a 12V switched relay 500mA directly connected to POE (non-Isolated form C)

Wiring

Wiring Connections for various Interfaces.

Rs232 Interface and TTL Interface

Red	+VDC
Blue	GND
Green	Reader Transmit
Yellow	Reader Receive

Rs422/Rs485 4-Wire Interface

Red	+VDC
Blue	GND
Green	Reader Transmit +
White	Reader Transmit -
Yellow	Reader Receive +
Orange	Reader Receive -

Rs422/Rs485 2-Wire Interface

Same as 4-wire interface, except combine Green&Yellow, White & Orange

Wiegand / ABA / Wand Interface

Red	+VDC
Blue	GND
White	Data 1 / Mag Data / Wand / F2F
Green	Data 0 / Mag Clock
Orange	Green LED
Yellow	Bi-color LED

Relay Wiring (All Readers)¹


Yellow	Normally Closed
Green	Normally Open
Red	Common

Sense Input Wiring

Yellow	Sense Input 1
Orange	Sense Input 2

The above wiring connections apply to standard readers only.
Contact IBC for non-standard wiring connections.

¹For POE (power over ethernet) readers, without an isolated relay, the **green wire** (normally open) will have 12V DC available when the relay is **ON**. The **yellow wire** (normally closed) will have 12V DC power when the relay is **OFF**.

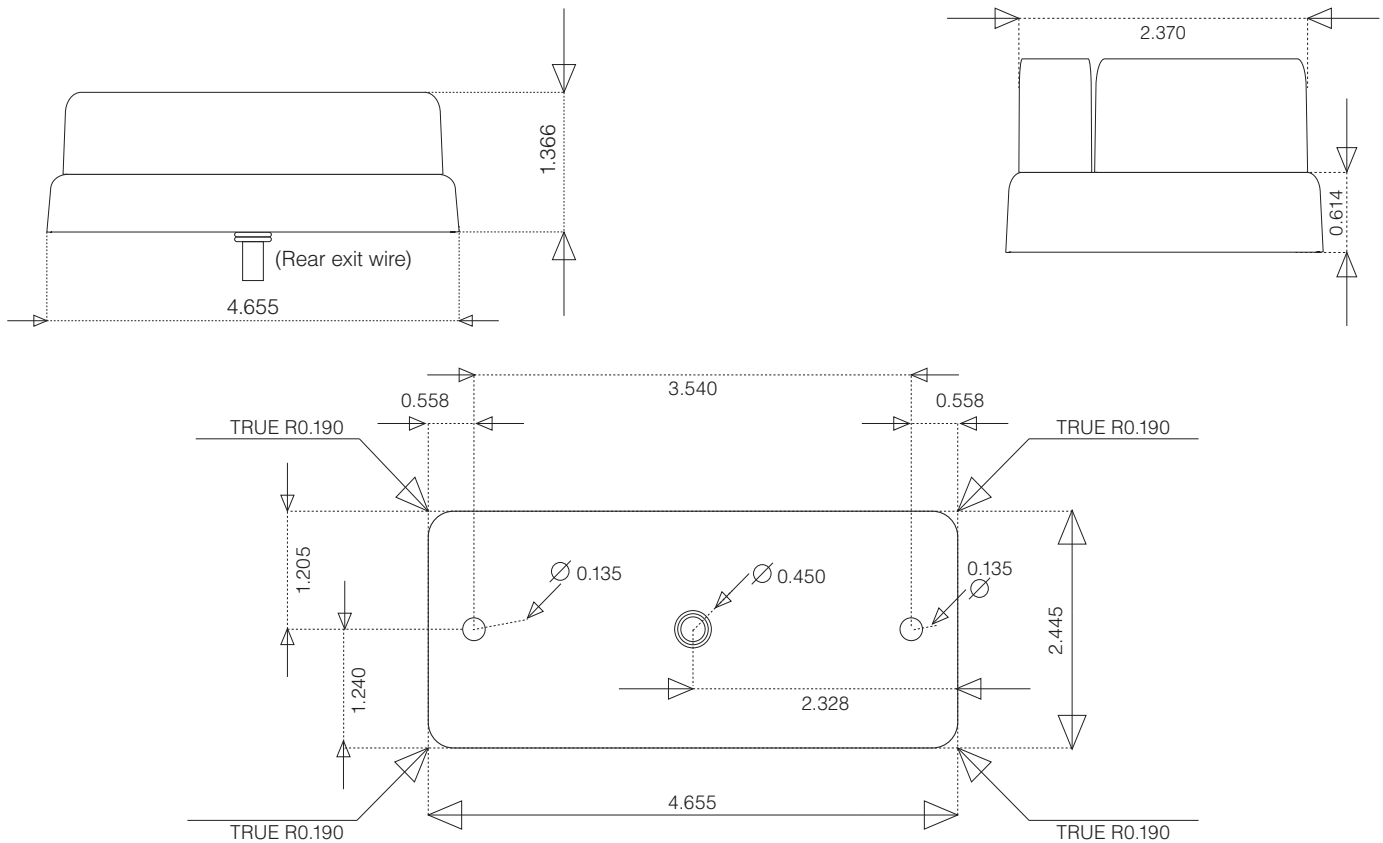

Notes for Ordering Smart Slot JX Readers

POWER

Standard JX Series readers are powered with 5V DC. 12V DC and 24V DC are optional. 12V DC is recommended when connecting to panels.

WIRING

Readers can be ordered with a side wire exit, rear wire exit, or RJ12 rear jack, depending on the interface. Standard wiring for 5V Rs232 and all Rs422 readers is a 3' cable with flying leads. 5V Rs232 readers can be ordered with a DB9 connector and power wired to one of the pins. 12V and 24V Rs232 readers contain a 3' cable with a DB9 female connector, and a power pigtail for connection to an AC adaptor; which is included.

Standard wiring for all emulation outputs (wand, magstripe, wiegand) is a 3' cable with flying leads. Standard wiring for TCP readers is a 5' cable with a RJ45 jack and

a RJ45 coupler. Standard wiring for usb readers is a 6' cable with a USB type A plug for direct connection to a PC.

Readers with sense inputs may contain a separate wire for the 2 sense inputs depending on the configuration. Readers with an external keypad interface contain a separate wire for connection to an external keypad. Power pigtails and an AC adaptor can be provided for all 12V and 24V readers that are ordered with flying leads. Custom wiring is available for most configurations.

RELAY

Readers with a relay contain a separate wire with flying leads for the relay connections. The relay is isolated for all configurations except POE. POE readers supply power directly to the relay, unless an isolated relay option is specified. The relay option is not available with readers

ordered with an RJ12 jack.

LEDs

Readers can be ordered with 1 green LED, 1 red LED, red and green LEDs, or 1 bi-color and 1 green LED (default).

MOUNTING

The reader mounts from behind and is available with a 3mm screw insert or a 6-32 screw insert. The reader may be mounted from the front using the IBC Mounting Kit (Part No. MK-L).

For custom wiring or firmware contact IBC.